



BLACK JACK

"DIRECT TO BARE METAL"

Controlled Flow Epoxy Seam Sealer

"Lifetime Warranty"

Black Jack has tremendous adhesion and sealing capabilities when applied to both bare metal or over catalyzed two part epoxy or etch primer.

This controlled flow Two part Epoxy seam sealer is designed for door skins and roof channels and many upper trunk seams.

Two Mixer nozzles, Working times: 10 minutes. Black color.

7.3 fl. oz. Dual Cartridges

"Go with the Flow"

Controlled Flow Seam Sealer # CB-J2

Mixer Nozzle

GTMN

Gun

GTSU, # GF-21



- Excellent corrosion fighting and "Wet Out" on bare metals.
- Sealer flows into micro spaces.



- Controlled flow, excellent for roof gutters and trunk corners.
- Can be repaired/top coated with polyester compounds!
- No Blistering.



- Controlled flow, allows taped out seams,.
- Excellent for duplicating O.E.M. door skin bead sealer.

LAP SHEAR COMPARISON TABLE — Aluminum to Aluminum

PRODUCT	APPLICATION	LAP SHEAR AT FULL CURE
Crest Code Blue	Plastic Repair (Flexible / Semi Rigid)	767 PSI
Crest Red Line	SMC/Plastic Repair (Rigid)	838 PSI
Crest Black Majik	Seam Sealer (Heavy Bodied)	2159 PSI
Crest Black Jack	Seam Sealer (Controlled Flow)	2087 PSI
Crest Thick N Tan	Seam Sealer (Extra Heavy Bodied)	2159 PSI
Crest Metal Gray	Seam Sealer (Heavy Bodied)	2150 PSI
Crest Skinner	Small Panel Bonder - 30 min.	3500 PSI
Crest Panel Bonder	Panel Bonder - 90 min.	3525 PSI
3M 8115	Panel Bonder	3538 PSI
3M 8308	Seam Sealer (Heavy Bodied)	937 PSI
SEM 39747	Panel Adhesive	1525 PSI
Lord Fusor 112B	Panel Adhesive	1570 PSI

F1

SEALERS



All Crest
Epoxy Seam Sealers are:
"DIRECT TO BARE METAL"
Each comes with a written,
"Lifetime Warranty"



BLACK MAJIK
"DIRECT TO BARE METAL"
Heavy Bodied Epoxy Seam Sealer, 2159 PSI "Lifetime Warranty"

Black Majik has tremendous adhesion and sealing capabilities when applied to both bare metal or over catalyzed two part epoxy or etch primer. This Heavy Bodied Two part Epoxy seam sealer is designed for every day applications where non sag performance is needed and rapid handling is necessary . A true 10 minute working time seam sealer. Two Mixer nozzles Working times: 10 minutes. Black color. 7.3 fl. oz. Dual Cartridges

"A real Stand Up seam sealer"

Non Sag Seam Sealer
Mixer Nozzle
Gun

CB-M1
GTMN
GTSU, # GF-21



- Easily duplicate O.E.M. seams.
- Actual 10 minute working time.
- More nozzle life
- Less nozzle waste.



- Excellent **FAST** patch panel bonder.
- Seals and bonds in one application!
- 2159 PSI Lap Shear!



- Heavy body, excellent non-sag.
- Duplicates hood & trunk lid seams,
- interior trunk body and floor seams.
- Will not sag on vertical or inverted surfaces.



THICK N TAN

"DIRECT TO BARE METAL"

EXTRA Heavy Bodied Epoxy Seam Sealer

"Lifetime Warranty"

Thick N Tan is approved for bare metal. It has tremendous adhesion and sealing capabilities when applied to both bare metal or over catalyzed two part epoxy or etch primer. This heavy bodied two part epoxy seam sealer is designed for every day applications where non sag performance is needed and rapid handling is necessary. Thick-n-Tan is a higher viscosity product than Black Majik. Therefore, it has even more resistance to sagging and it retains all brush marks or other surface textures. It does not flow.

- Tan Color to match OEM
- Bare Metal Approved
- Non-Sag & Non-Flow
- Retains all brush marks
- Great flexibility
- 10 minute working time
- 30 minute paint time
- Comes with 2 Mixer nozzles.
- 7.3 fl. oz. Dual Cartridge

"A real Stand Up seam sealer"

Seam Sealer
Mixer Nozzle
Gun

CTNT
GTMN
GTSU, # GF-21



Duplicates O.E.M.'s Color and Texture

METAL GRAY

"DIRECT TO BARE METAL"

Heavy Bodied Epoxy Seam Sealer, 2150 PSI

"Lifetime Warranty"

Metal Gray is "Direct to Bare Metal", has a "Life Time "Corrosion Protection" Warranty".

Has tremendous adhesion and sealing capabilities when applied to both bare metal or over catalyzed two part epoxy or etch primer. This Heavy Bodied Two part Epoxy seam sealer is designed to "mimic" the color of metal and aluminum, resulting in faster priming while using less material and saving material cost!

A true 10 minute working time seam sealer.

Two Mixer nozzles Working times: 10 minutes. Gray color.

7.3 fl. oz. Dual Cartridges

7.3 oz. Dual Cartridge

CMG7

Mixer Nozzle
Gun

GTMN
GTSU, # GF-21



"Mimics" the color of METAL



F3

SEALERS

GRAY



DURA-SEAM PLUS

Hybrid Technology Seam Sealer

10 Minute Skin Time, Extremely Fast Strength Build
Paintable Immediately
Direct-To-Metal
Solvent Free, Water Free, Isocyanate Free
Tough/Durable/Flexible
Gun Grade, Excellent Non-Sag. Can be Applied Vertical and Overhead
Easily Tooled – Retains Brush Marks, Compatible with Crest Solvents
Wet/Dry Surfaces
VOC Compliant, Low Odor

BONDS: Door skin lap seams
Hood panel reinforcements
Ground effect facias

SEALS: Drip rails, Shock towers
Seams in Hi-Flex areas
Large trunk seams
Wheel well area seams

OTHER APPLICATIONS:
General Automotive Seam Sealer
Trailer and RV
Construction and Roofing
Industrial Manufacturing
Wall Stone, Landscape Block Adhesive
Shower Panels/Mirrors/Countertop/Subfloor Adhesive

10.2 oz. Cart. Gray # CDP
Extra Nozzle # WCS



F4

SEALERS

MULTI-SEAM

HEAVY BODIED - NON SAG

Paintable immediately

Sprayable Seam Sealer

Designed to reproduce O.E.M. look and color characteristics. Available in Gray, Tan, White and Black. Extremely strong bonding. Permanently flexible and will not shrink or crack! Isocyanate free.

Bare metal approved as well as primed and painted surfaces.



- Paint WET on WET or up to 7 DAYS
- 0% VOCs
- May be applied to Bare Metal or to primer
- Flexible
- Non-Sagging
- High Strength
- Retains patterns and brush marks
- Maybe sprayed, brushed or applied in a bead

10.3 oz. net wt. Cart.	Black	# CMSS
10.3 oz. net wt. Cart.	Tan	# CMST
10.3 oz. net wt. Cart.	Gray	# CMSG
10.3 oz. net wt. Cart.	White	# CMSW



MULTI-SEAM SPRAY GUN

Spray Gun	# GMSG
Outer Nozzle	# WMSO
Inner Nozzle	# WMSI
Ribbon Nozzle	# GTRA

F5

SEALERS



BRUSHABLE QWIK SEAM

Formulated to dry through a paint film
 Skins in 5-10 min., paint immediately upon skinning. Low Odor when applied.
 Natural off-white color or black
 Bonds to wet or dry surfaces
 Excellent bonding to high-solids paints
 Will not crack, peel or shrink
 Tools easily. sandable, non-sagging, non-staining
 Extra tough yet remains permanently flexible

32 oz. Quart

Natural
Black

BJN
BJBQ

DRIP SEAL

8 oz. Tube **Black** # TJ B

8 oz. Tube **Clear** # TJ C

QWIK SEAM

Tube Grade Formulated to dry through a paint film
 Skins in 5-10 min., paint immediately upon skinning
 Natural off-white color Bonds to wet or dry surfaces
 Excellent bonding to high- solids paints
 Will not crack, peel or shrink Tools easily. sandable,
 non-sagging, non-staining Extra tough yet remains
 permanently flexible

8 oz. Tube **Natural** # TJN



QWIK SEAM

Cartridge, Tube Grade & Brushable

Formulated to dry through a paint film
 Skins in 5-10 min., paint immediately upon skinning
 Natural off-white color or black Bonds to wet or dry surfaces
 Excellent bonding to high-solids paints
 Will not crack, peel or shrink. Tools easily.
 Sandable, non-sagging, non-staining Extra tough yet remains
 permanently flexible

11 oz. Cart. **Natural** # CJN
 11 oz. Cart. **Black** # CJB



F6

SEALERS

FLEXI-ROLL

Sound deadening mat. Designed to replace trunk mat and restore O.E.M. appearance.
Very flexible, when heated, melts to conform to any contour. Can be easily trimmed to any size or shape.


3'x 5' Rolled Sheet # XFR



FLEXI-SQUARES

Sound deadening pads.
Very flexible, excellent adhesion, paintable, waterproof and duplicates O.E.M. appearance.

12"x12" 6/box # XFS

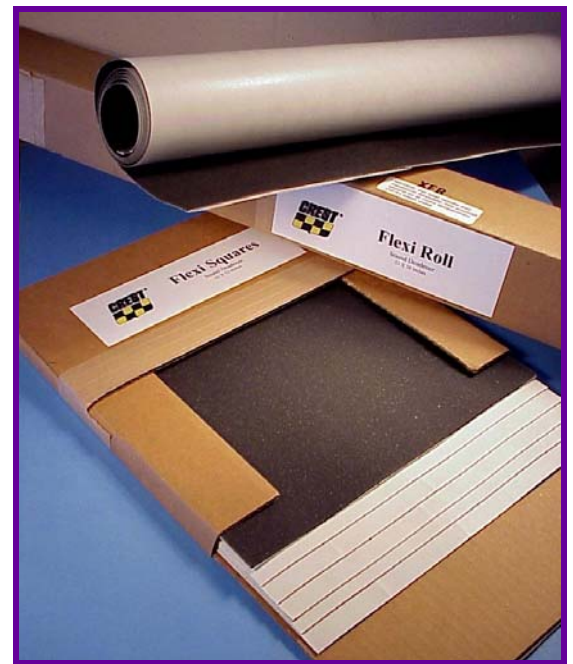

FLOOR FILM

The new Floor Film is a Clear multi-task self adhering protective sheeting with UV Inhibitors. Specially designed to help keep the paint booth clean from over spray accumulation.
Can be used as a floor runner in your office. Popular as a work bench cover. Great for a weather guard on the inner door panel.
The New Floor film 4 mil thick.

4' x 200' # ZRFF



CLEAR GUARD SMASH WRAP

The new Smash wrap is a solvent based adhesive which means no more adhesive transfer which means quicker clean up.
Clear multi-task self adhering protective sheeting with UV Inhibitors. Excellent for sealing broken glass. Protects paint booths and lights from over spray accumulation.
Excellent for covering seats and floors of customers cars.
Can be used as a floor runner in your office. Popular as a work bench cover. Great for a weather guard on the inner door panel.
The New Smash Wrap is 4 mil THICK!

3' x 100' # ZRSW



F7

SEALERS



SILICONE RUBBER SEALER

Multipurpose silicone rubber.
Excellent gasket sealer
Heat resistant, Superior oil resistance

10.3 oz. Cart	Black	# CSSB
10.3 oz. Cart	Clear	# CSSC
10.3 oz. Cart	White	# CSSW
Nozzle		# WCS



BLACK STRIP CAULK

XSB

This is some of the best Dum Dum there is.

F8

SEALERS

FAST SET HI-VISCOSITY URETHANE

FAST CURE - Structural Windshield Adhesive & Sealant.

- This fast set urethane is a "high viscosity" product and does not require dams or shims to support the glass. Drive away time of 4 hours. CUV is primerless to glass and original urethane sealants. Use urethane primer, Stock # BPV on bare or painted metal..
- Low Conductive: can be used with windshields with electronics (Cameras)
- Excellent seam sealer, Paintable immediately

10.5 OZ. Cart. Black # CUV
Standard Nozzle # WCUV

UNIVERSAL URETHANE PRIMER

Designed for use with SRP Fast Set Urethane, CUV. May be used on metal pinchweld, clear glass, plastic or metal encapsulated glass and glass frit bands. Applying primer to existing urethane is not recommended. Allow 10-15 minutes to dry. Two daubers with each can. Read and follow instructions with primer.

1.0 oz. Black # BPV



DAUBERS, 12 PACK # WDU



BUTYL TAPE

Multi use adhesive tape

Not as popular as the old days for installing windshields, but it is still a go to for many shop needs.

1/4 x 15' Roll # RWR1/4S
5/16 x 15' Roll # RWR5/16S



DAM TAPE

Single Sided Adhesive Foam.

Allows air to pass thru tape to cure urethane sealers in recommended times.

50' rolls
6 mm x 6 mm #RFD6MM

F9

SEALERS